

6.7.1.1. Single channel

For single channel mode (2x100W), two jumpers on the amplifier unit must be plugged in the “100V” position (center position). One jumper per channel.



Jumper setting 100V per channel – amplifier unit




Single channel: line 1, line 2 – loudspeaker line output

6.7.1.2. Bridged

For bridged mode, (1x200W) four jumpers must be plugged in the “50V” position (left & right position). Two jumpers per channel.



Jumper setting 50V per channel – amplifier unit

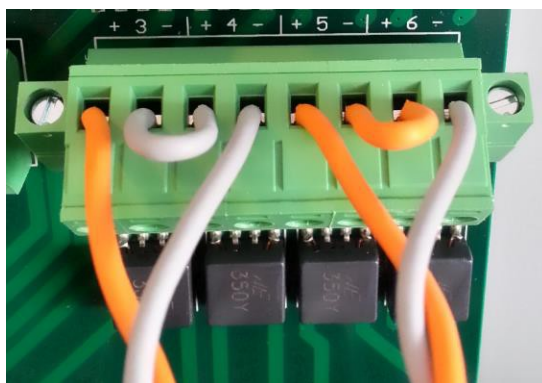

Bridged lines: 3+4, 5+6 – loudspeaker line output